


HTWP - TORQUE WRENCH PUMPS

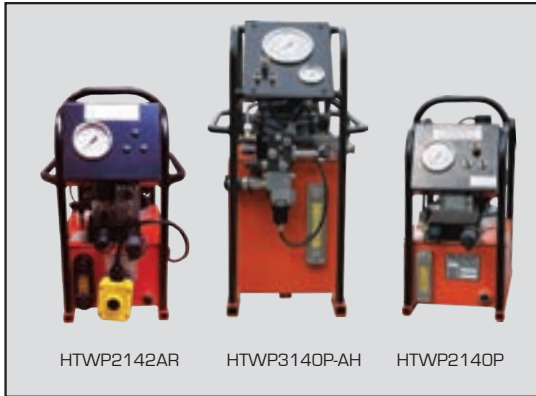


Working pressure 10000 PSI

Choice of air or electric power options

Supplied complete with hand pendant controller

Hi-Force hydraulic torque wrench pumps are compatible for use with all Hi-Force hydraulic torque wrenches. All models are 10000 PSI maximum working pressure, fitted with an easily accessible and adjustable torque setting pressure relief valve, and are available as air driven or electric driven pump units. All pumps are supplied with a remote operation, push button hand pendant controller with 10 feet of control line cable. Glycerin filled, easy to read, dual scale (0-700 Bar/0-10,000 PSI) hydraulic pressure gauges are fitted as standard to all models. Air driven versions also include an integral inline filter, regulator, lubricator system with airline pressure gauge and an exhaust air cooling system.

- >> Dual scale glycerin filled pressure gauge fitted as standard
- >> Two speed operation with choice of standard length hoses available
- >> Externally adjustable torque setting pressure relief valve fitted as standard
- >> Protective carrying frame and oil sight level gauge
- >> Air pressure gauge and filter-regulator-lubricator unit (air powered pumps only)
- >> Integral oil cooling system (air powered pumps only)
- >> HTWP2141/2AR and HTWP2141/2ARH are fitted with auto retract function as standard

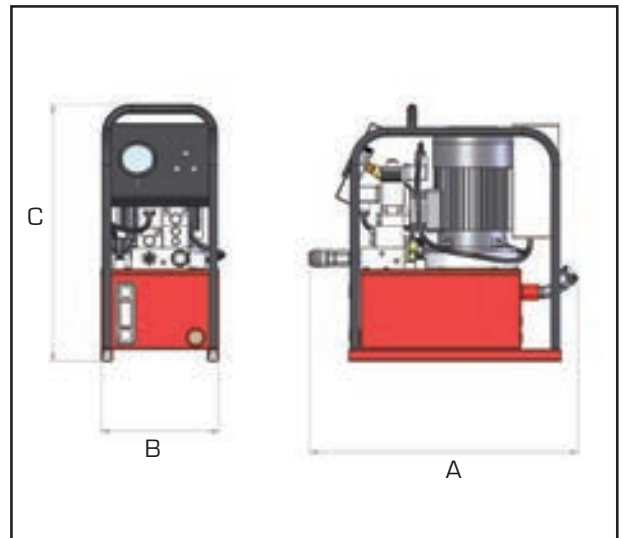

Model number	Max pressure PSI	Power supply	Motor rating hp	Displacement inch ³ /min		Changeover pressure PSI	Weight lbs	Dimensions in inches		
				low pressure	high pressure			A	B	C
HTWP2140P	10000	100 PSI	2.04	372.24	31.12	870	61.7	18.44	8.08	17.53
HTWP2141AR	10000	110 volt	0.75	238.00	21.97	870	75.0	18.44	8.08	17.53
HTWP2141ARH	10000	110 volt	0.75	238.00	21.97	870	75.0	18.44	8.08	17.53
HTWP2142AR	10000	240 volt	0.75	238.00	21.97	870	75.0	18.44	8.08	17.53
HTWP2142ARH	10000	240 volt	0.75	238.00	21.97	870	75.0	18.44	8.08	17.53
HTWP3140P-A	10000	100 PSI	5.03	823.82	115.94	1450	132.3	21.55	9.69	23.21
HTWP3141P-A	10000	110 volt	3.00	384.45	54.92	1450	158.7	21.55	9.69	25.73
HTWP3141P-AH	10000	110 volt	3.00	384.45	54.92	1450	158.7	21.55	9.69	25.73
HTWP3142P-A	10000	240 volt	3.00	384.45	54.92	1450	158.7	21.55	9.69	25.73
HTWP3142P-AH	10000	240 volt	3.00	384.45	54.92	1450	158.7	21.55	9.69	25.73

F